

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number
WO 01/72067 A1

(51) International Patent Classification⁷: **H04Q 7/32**

(21) International Application Number: PCT/US00/13288

(22) International Filing Date: 15 May 2000 (15.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/531,367 21 March 2000 (21.03.2000) US

(71) Applicant (for all designated States except US): **AIRBIQ-
UITY INC.** [US/US]; 1001 Hildebrand Lane Ne, Suite
200, Bainbridge Island, WA 98110 (US).

(71) Applicants and

(72) Inventors: **PRESTON, Dan, A.** [US/US]; 11621 Mead-
owmeer Circle Ne, Bainbridge Island, WA 98110 (US).
PRESTON, Joseph [US/US]; 12661 Sunrise Drive Ne,
Bainbridge Island, WA 98110 (US). **LEYENDECKER,
Robert** [US/US]; 17223 Baker Street Sw, Aloha, OR

97007 (US). **EATHERLY, Wayne** [US/US]; 7509 86th
Street E, Puyallup, WA 98371 (US). **POCTOR, Rod, L.**
[US/US]; 1446 Madrona Drive, Seattle, WA 98122 (US).

(74) Agent: **FERRIS, Kassim, M.**; Steel Rives LLP, 900 SW
Fifth Avenue, Suite 2600, Portland, OR 97204-1268 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: VOICEBAND MODEM FOR DATA COMMUNICATIONS OVER DIGITAL WIRELESS NETWORKS

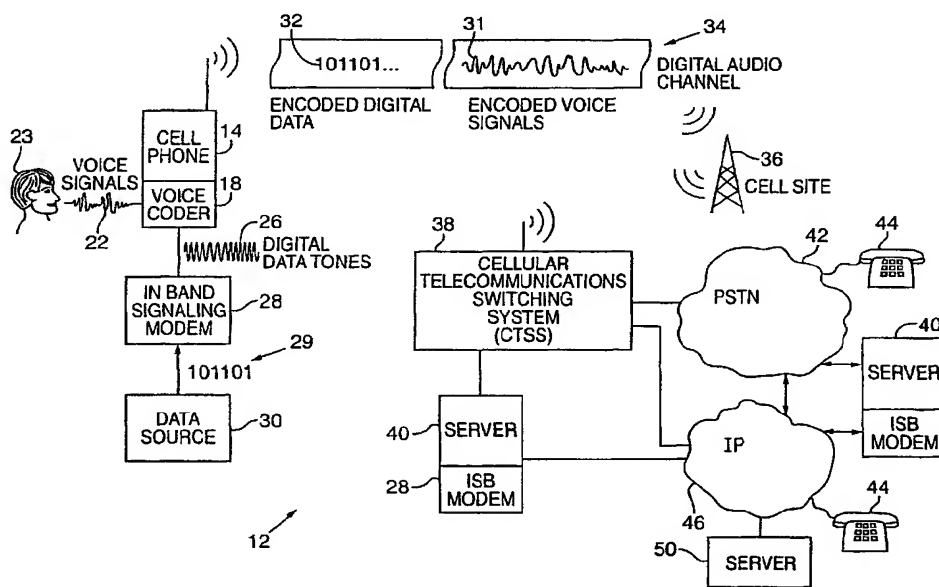

(57) Abstract: An inband signaling modem communicates digital data over a voice channel of a wireless telecommunications network. An input receives digital data. An encoder converts the digital data into audio tones that synthesize frequency characteristics of human speech. The digital data is also encoded to prevent voice encoding circuitry in the telecommunications network from corrupting the synthesized audio tones representing the digital data. An output then outputs the synthesized audio tones to a voice channel of a digital wireless telecommunications network.



— *with amended claims*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

VOICEBAND MODEM FOR DATA COMMUNICATIONS OVER DIGITAL WIRELESS NETWORKS

10

Related Applications

15 This application is a CIP of co-pending U.S. Application No. 09/230,079, filed May 13, 1999, which is the U.S. national phase application corresponding to International Application No. PCT/US98/10317, filed May 19, 1998.

Technical Field

20 This invention is related to wireless telecommunications and more specifically to a system that transmits digital data over the audio channel of a digital wireless network "in-band."

Background of the Invention

25 A cellular telephone allows a user to talk to another user without being tethered to a "land line." The cell phone includes circuitry that samples the audio signals from the user's voice. These voice signals are converted into a digital form using an A-D converter. The digitized voice signals are encoded by a voice coder (vocoder) and then modulated onto a carrier frequency that transmits the voice signals over a cell network. The voice signals are sent over the wireless cellular network either to another phone in the wireless cell network or to another phone in a land-line phone network.

30 Different coders/decoders (codecs), modulators, vocoders, Automatic Gain Controllers (AGC), Analog to Digital converters (A/D), noise reduction circuits, and Digital to Analog converters (D/A) are used in the cellular and landline phone

networks. These telephone components can implement different coding schemes for encoding and decoding the voice signals.

These telecommunication components are designed to efficiently transmit voice signals over wireless and landline voice communication channels. For example, a digital vocoder uses predictive coding techniques to represent the voice signals. These predictive coders filter out noise (non-voice signals) while compressing and estimating the frequency components of the voice signals before being transmitted over the voice channel.

A problem arises when voice communication equipment, such as the vocoder, are used for transmitting digital data. The vocoders may interpret signals representing digital data as a non-voice signal. The vocoder might completely filter out or corrupt those digital data signals. Therefore, digital data can not be reliably transmitted over the same digital audio channel used for transmitting voice signals.

It is sometimes necessary for a user to transmit both audio signals and digital data to another location at the same time. For example, when a cellular telephone user calls "911" for emergency assistance, the user may need to send digital location data to a call center while at the same time verbally explaining the emergency conditions to a human operator. It would be desirable to transmit this digital data through a cell phone without having to use a separate analog wireless modem.

Accordingly a need exists for transmitting digital data over a voice channel of a digital wireless communications network.

Summary of the Invention

An inband signaling modem communicates digital data over a voice channel in a digital wireless telecommunications network. An input receives digital data. An encoder converts the digital data into audio tones that synthesize frequency characteristics of human speech. The digital data is also encoded to prevent voice encoding circuitry in the telecommunications network from corrupting the synthesized audio tones representing the digital data. An output then outputs the synthesized audio tones to a voice channel of a digital wireless telecommunications network.

The foregoing and other features and advantages of the invention will become

more readily apparent from the following detailed description of preferred embodiments of the invention, which proceeds with reference to the accompanying drawings.

Brief Description of the Drawings

5 FIG. 1 is a diagram showing a wireless communications network that provides in-band signaling (IBS) according to the invention.

 FIG. 2 a detailed diagram of a cellular telephone coupled to an IBS modem according to one embodiment of the invention.

 FIG. 3 is another embodiment of the IBS modem according to the invention.

10 FIG. 4 is a detailed diagram of an IBS modem encoder.

 FIG. 5 is a schematic diagram of a IBS packet.

 FIG. 6 is a schematic diagram of digital data tones output from a IBS modulator.

 FIG. 7 is a diagram showing how digital data is corrupted by an Automatic Gain Controller.

 FIG. 8 is a diagram showing how a digital wireless network can filter out digital data tones.

 FIG. 9 is a detailed diagram of receiving circuitry coupled to an IBS modem decoder.

20 FIG. 10 is a state diagram for the IBS decoder shown in FIG. 9.

 FIG. 11 is a block diagram showing a search state in the IBS decoder.

 FIG. 12 is a block diagram showing an active state in the IBS decoder.

 FIG. 13 is a block diagram showing a clock recovery state in the IBS decoder.

 FIG. 14 is a schematic diagram of a cellular phone with the IBS modem located in a detachable battery pack.

 FIG. 15 are schematic diagram showing different data sources coupled to a cellular telephone through a IBS modem.

Detailed Description of Preferred Embodiments

30 Referring to FIG. 1, a wireless communications network 12 includes a cell phone 14 that receives voice signals 22 from a user 23. A voice coder (vocoder) 18

in the cell phone 14 encodes the voice signals 22 into encoded digital voice signals 31 that are then transmitted over a wireless digital audio channel 34 (cell call). The cell phone 14 transmits the encoded voice signals 31 to a cellular communications site (cell site) 36 that relays the cell call to a Cellular Telecommunications Switching System (CTSS) 38.

The CTSS 38 either connects the cell call to another cell phone either in the wireless cellular network 12, to a landline phone on a PSTN network 42 as a circuit switched call or routes the cell call over a packet switched Internet Protocol (IP) network 46 as a Voice Over IP (VoIP) call. The cell call can also be routed from the PSTN network 42 back to the cellular network 12 or from the PSTN network 42 to the IP network 46, or visa versa. The cell call eventually reaches a telephone 44 that corresponds with a destination phone number originally entered at the cell phone 14.

The invention comprises an In-Band Signaling (IBS) modem 28 that enables cell phone 14 to transmit digital data 29 from a data source 30 over the digital audio channel 34 of the cellular network 12. The IBS modem 28 modulates the digital data 29 into synthesized digital data tones 26. The digital data tones 26 prevent the encoding components in the cellular network 12 and landline network 42, such as vocoder 18, from corrupting the digital data. The encoding and modulation scheme used in the IBS modem 28 allows digital data 29 to be transmitted through the same voice coder 18 used in the cell phone 14 for encoding voice signals 22.

The IBS modem 28 enables voice signals 22 and digital data 29 to be transmitted over the same digital audio channel using the same cell phone circuitry. This prevents a user from having to transmit digital data using a separate wireless modem and enables a cell phone user to talk and send data during the same digital wireless call.

The invention modulates the digital data 29 into synthesized voice tones. This prevents the cell phone vocoder 18 from filtering or corrupting the binary values associated with the digital data 29. The same cell phone transceiver and encoding circuitry is used for transmitting and receiving both voice signals and digital data. This enables the IBS modem 28 to be much smaller, less complex and more energy efficient than a standalone wireless modem. In some embodiments, the ISB modem

28 is implemented entirely in software using only the existing hardware components in the cell phone 14.

One or more servers 40 are located at any of various locations in the wireless network 12, PSTN network 42, or IP network 46. Each server 40 includes one or more IBS modems 28 that encode, detect and decode the digital data 29 transmitted and received over the digital audio channel 34. Decoded digital audio tones 26 are either processed at the server 40 or routed to another computer, such as computer 50.

Referring to FIG. 2, a first transmitting portion of the IBS modem 28 includes an ISB encoder 52 and a Digital to Analog converter (D/A) 54. The ISB encoder 52 is typically implemented using a Digital Signal Processor (DSP). The data source 30 represents any device that requires wireless transmission or reception of digital data. For example, the data source 30 can be a laptop computer, a palm computer or a Global Positioning System (GPS) (see FIG. 15).

The data source 30 outputs a digital bit stream 29 to the IBS encoder 52. The IBS encoder 52 converts the digital data 29 into IBS packets specially formatted for transmission over a digital wireless voice channel. The IBS encoder 52 then converts the bits from the IBS packets into digital data tones that are then fed into the D/A converter 54.

The IBS modem 28 outputs binary values that each represent an amplitude and phase component of an audio tone. The D/A converter 54 converts these digital values into analog audio tones 26 that are then output to an auxiliary audio port 15 on the cell phone 14. The analog audio tones 26 are then processed by the cell phone 14 in the same manner as the voice signals 22 (FIG. 1) received through a microphone 17. An Analog to Digital (A/D) converter 16 in the cell phone 14 encodes the synthesized analog audio tones 26 into digital values. The vocoder 18 encodes the digital representations of the synthesized tones 26 into encoded digital data 32 and outputs the encoded data to a transceiver 19 that transmits the encoded digital data 32 over the digital audio channel 34.

The preferred voltage of the synthesized audio tones 26 output from the D/A converter 26 is around 25 millivolts peak to peak. This voltage level was discovered

to prevent the audio tones 26 from saturating the voice channel circuitry in cell phone 14.

Because the digital data 29 is fed through the existing auxiliary hands free audio port 15 in cell phone 14, the IBS modem 28 can be installed as an after market
5 device that can connect any data source 30 to the cell phone 14. The data source 30 can transmit digital data 29 in any digital format. For example, the digital data 29 can be sent over an RS-232 interface, Universal Serial Bus (USB) interface, or any other serial or parallel interface.

FIG. 3 shows an alternative embodiment of the IBS modem 28. The IBS
10 modem 28 in FIG. 3 is located inside the cell phone 14 and is implemented in software using the existing cell phone processor or using some combination of its own components and the existing cell phone components. In this embodiment, the cell phone 14 may include a data port 56 that receives the digital data 29 from the external data source 30. In an alternative embodiment, the digital data source 30 is
15 internal to the cell phone 14. For example, the data source 30 may be a Global Positioning System (GPS) chip that includes a GPS receiver (not shown) for receiving global positioning data from GPS satellites (FIG. 14).

The IBS encoder 52 in FIG. 3 as mentioned above typically implemented in software using a DSP and may use the same DSP used for implementing the vocoder
20 16. The D/A converter 54 outputs the synthesized audio tones representing digital data 29 to the internal A/D converter 18 of the cell phone 14. The IBS encoder 52 in an alternative embodiment, not only synthesizes the digital data 29 into audio tones but also quantizes the digital frequency values in the same manner as the A/D converter 18. The IBS encoder 52 then outputs the quantized data 55 directly into the
25 vocoder 16. In still another embodiment of the invention, the IBS encoder 52 and D/A converter 54 are implemented entirely in software in the same DSP that implements the vocoder 16.

The vocoder 18 uses a specific encoding scheme associated with the wireless communications network 12 (FIG. 1). For example, the vocoder 18 could be a
30 VCELP encoder that converts voice signals into digital CDMA signals. The A/D

converter 18, D/A converter 54 and transceiver 19 are existing cell phone components known to those skilled in the art.

It is important to note that the IBS encoder 52 enables the digital data 29 to be transmitted using the same cell phone circuitry that transmits voice signals. The IBS encoder 52 prevents any signal approximation, quantization, encoding, modulation, etc. performed by the, A/D converter 18, vocoder 16, or transceiver 19 from corrupting or filtering any bits from the digital data 29.

FIG. 4 is a detailed diagram of the IBS encoder 52 shown in FIG. 2 and FIG. 3. A data buffer 58 stores the binary bit stream 29 from the data source 30. A packetizer 60 segments the bits in buffer 58 into bytes that comprise a IBS packet payload. A packet formatter 62 adds a packet preamble and postamble that helps prevent corruption of the IBS packet payload. An IBS modulator 64 then modulates the bits in the IBS packet with two or more different frequencies 66 and 68 to generate digital data tones 69.

Preventing Corruption of Digital Data in Voice Channels

Cell phone voice coders increase bandwidth in voice channels by using predictive coding techniques that attempt to describe voice signals without having to send all the frequency information associated with human speech. If any unnatural frequencies or tones are generated in the voice channel (i.e., frequencies representing digital data), those frequencies might be thrown out by the voice coder 18 (FIG. 2). For example, if the amplitude of the digital data tones are greater than that of normal voice signals or the same digital data tone is generated for too long a time period, the voice coder 18 will filter out that high amplitude or extended frequency signal. Depending on how the digital data tones are encoded, the digital bits represented by those unnatural audio tones may be partially or entirely removed from the voice channel.

The IBS encoder 52 encodes the digital data 29 to synthesize voice signals in a manner where voice coders will not filter or corrupt the tones representing digital data. The IBS encoder 52 does this by controlling the amplitudes, time periods and patterns of the synthesized frequencies used to represent the binary bit values.

Referring to FIG. 5, the packet formatter 62 (FIG. 4) adds a packet preamble 73 that includes a header 72 and a sync pattern 74 to the front of a IBS packet 70. A checksum 78 and a packet postamble 79 are attached to the backend of the IBS packet 70.

5 Before the digital data is transmitted, a zero payload IBS packet 70 is sent to the destination. The destination sends back an acknowledge to the IBS modem 28 in the form of a zero packet payload IBS packet. This acknowledge packet informs the IBS modem 28 in the cell phone 14 to begin transmitting IBS packets 70.

FIG. 6 shows the synthesized digital data tones 69 output from the IBS
10 modulator 64 (FIG. 4). The IBS modulator 64 (FIG. 4) converts the digital bits in the IBS packet 70 into one of two different tones. A first tone is generated at an f1 frequency and represents a binary "1" value and a second tone is generated at a f2 frequency and represents a binary "0" value. In one embodiment the f1 frequency is 600 Hertz and the f2 frequency is 500 Hertz (Hz).

15 It has been determined that the most effective frequency range for generating the tones that represent the binary bit values are somewhere between 400 Hertz and 1000 Hertz. The IBS modulator 64 includes Sine and Cosine tables that are used to generate the digital values that represent the different amplitude and phase values for the f1 and f2 frequencies.

20 In one embodiment of the invention, the digital data is output on the audio channel 34 at a baud rate of 100 bits/second. This baud rate has been found to be effective in preventing corruption of the digital audio data by a wide variety of different cellular telephone voice coders. The sine waves for each f1 and f2 tone begin and end at a zero amplitude point and continue for a duration of 10
25 milliseconds. Eighty samples are generated for each digital data tone.

Referring to FIG. 7, an Automatic Gain Controller (AGC) 80 is one encoding
function used in the cell phone 14. The AGC 80 may be software that is located in
the same DSP that implements the voice coder 16. The AGC 80 scales instantaneous
energy changes in voice signals. There are situations when no voice signals have
30 been fed into the AGC 80 for a period of time followed by a series of audio tones 82.

that comprise the beginning of a IBS packet 70. The AGC 80 scales the first group of tones 82 at the beginning of the IBS packet 70. The AGC 80 also looks ahead at the zero signal levels 84 after the end of the IBS packet 70, and will scale the tones 83 at the end of the IBS packet 70 as part of its prediction scaling scheme. This scaling prevents the over amplification of signal or noise when instantaneous energy changes occur in the voice channel.

As previously shown in FIG. 6, the "1" and "0" bits of the IBS packet 70 are represented by tones f1 and f2, respectively. If these tones are scaled by the AGC 80, the digital bits represented by those frequencies might be dropped during encoding. For example, the vocoder 16 may see the scaled tones as noise and filter them from the audio channel. To prevent the unintentional filtering of tones that represent digital data, the IBS packet 70 in FIG. 5 includes preamble bits 73 and postamble bits 79. The preamble bits 73 and 79 do not contain any of the digital data bits 29 from the data source include a certain number of sacrificial bit that are not needed for detecting or encoding the IBS packet 70. Thus, the tones that are generated for these sacrificial bits in the preamble and postamble can be scaled or filtered by the AGC 80 without effecting any of the digital data contained in the IBS packet payload 76.

The bit pattern in the header 72 and sync pattern 74 are specifically formatted to further prevent corruption of the packet payload 76. A random sequence and/or an alternating "1" - "0" sequence of bits is used in either the header 72 and/or sync pattern 74. These alternating or random bit patterns prevent adaptive filters in the cell phone vocoder 18 (FIG.2) from filtering tones representing the remaining bits in the IBS packet 70.

Referring to FIG. 8, adaptive filters adapt around the frequencies that are currently being transmitted over the wireless network. For example, If a long period of the same f1 tone is currently being transmitted, an adaptive filter used in the cell phone may adapt around that f1 frequency spectrum as shown by filter 86.

Another short tone at another frequency f2 may immediately follow the long period of f1 tones. If the filter 86 is too slow to adapt, the first few f2 tones may be

filtered from the voice channel. If the filtered f2 tone represent bits in the IBS bit stream, those bits are lost.

To prevent adaptive filters in the cell phone from dropping bits, some portion of the preamble 73 includes a random or alternating "1" - "0" bit pattern. This preconditions the adaptive filter as shown by filter 88. The preamble 73 tries to include a portion of the same bit sequence that is likely or does occur in the packet payload 76. For example, the IBS encoder 52 can look ahead at the bit pattern in the payload 76. The encoder 52 can then place a subset of bits in a portion of the preamble to represent the sequence of bits in the packet payload.

This preconditions the adaptive filter for the same f1 and f2 frequencies, in the same duration and in a similar sequence that is likely to follow in the IBS packet payload 76. Thus, the adaptive filter adapts is less likely to filter out the tones that actually represent the digital data that is being transmitted.

FIG. 9 is a block diagram of receive circuitry 91 that receives the voice and data signals in the audio channel 34. The IBS modem 28 also includes an IBS decoder 98 the detects and decodes the digital data tones transmitted in the audio channel 34. The receive circuitry 91 is located at the CTSS 38 (FIG. 1) that receives wireless transmissions from the cell sites 36 (FIG. 1). The same receive circuitry 91 is also be located in the cell phone 14.

As described above in FIGS. 2 and 3, the decoder part of the IBS modem 28 can be external to the cell phone 14 or can be inside the cell phone 14. Dashed line 104 shows an IBS modem 28 external to a cell phone and dashed line 106 shows an internal IBS modem 28 internal to a cell phone. IBS modems 14 can also be located at any telephone location in the PSTN network 42 or IP network 46 (FIG. 1). The receiving circuitry 91 may be different when the IBS modem 28 is coupled to a landline. However, the IBS modem 28 operates under the same principle by transmitting and receiving synthesized tones over the voice channel of the phone line.

The signals in audio channel 34 are received by a transceiver 90. A vocoder 92 decodes the received signals. For example, the vocoder 92 may decode signals

transmitted in TDMA, CDMA, AMPS, etc. A D/A converter 94 then converts the digital voice signals into analog signals. The analog voice signals are then output from an audio speaker 17.

If the IBS modem 28 is external to the receiving circuitry 91, then a A/D converter 96 converts the analog signals back into digital signals. The IBS decoder 98 demodulates any tones representing digital data back into a digital IBS packets. A packet disassembler 100 disassembles the packet payload from the IBS packets 70 and stores the original digital data pattern in a data buffer 102.

FIG. 10 is a state diagram explaining how the IBS decoder 98 in FIG. 9 operates. The IBS decoder 98 repeatedly samples and decodes the audio signals received from the audio channel 34. State 110 searches for tones in the audio signal that represent digital data. If the Signal to Noise Ratio (SNR), for tones within the frequency range of the digital data tones, are greater than a preselected value, the IBS decoder 98 goes into an active state 112. The active state 112 collects tone samples. If at any time during the active state 112, the SNR falls below an active threshold value, or a timeout is reached before enough tone samples are collected, the IBS decoder 98 returns to the search state 110 and begins again to search for digital data tones.

After a number of samples are collected, the IBS decoder 98 looks for bits that identify the preamble 73 in the IBS packet 70 (FIG. 5). If the preamble 73 is detected, the IBS decoder 98 moves to clock recovery state 114. The clock recovery state 114 synchronizes with the synchronization pattern 74 in the IBS packet 70 (FIG. 5). The IBS decoder 98 then demodulates the packet payload 76 in state 116. If the preamble 73 is not found, IBS decoder 98 goes back to the search state 110 and starts searching again for the beginning of an IBS packet 70.

The IBS decoder 98 demodulates all of the packet payload 76 and then performs a checksum 78 as a final verification that a valid IBS packet 70 has been successfully demodulated. Control then returns back to the search state 110 and begins searching for the next IBS packet 70.

FIG. 11 is a detailed diagram for the search state 110 of the IBS decoder 98.

The search state 110 uses in band and out of band filtering. "In band" is used in the following discussion to refer to tones within the frequency range of the two tones that represent the digital data binary "1" value (500 Hz) and the digital data binary "0" value (600 Hz).

5 A first band pass filter 118 (in band) measures energy for signals in the audio channel within the frequency range of about 400 Hz to around 700 Hz. A second band pass filter 120 (out of band) measures the energy in the audio channel for signals outside of the 400Hz – 700 Hz range. A Signal to Noise Ratio (SNR) is calculated in block 122 between the in band energy and the out of band energy. If
10 tones representing the digital data exist in the audio channel, the energy measured by the in band filter 118 will be much greater than the energy measured by the out of band filter 120.

 If the SNR is below a selected threshold in comparator box 124, signals in the audio channel are determined to be actual voice signals or noise. If the SNR is above
15 the threshold, the IBS decoder 98 determines the tones represent in band digital data. When digital data is detected, the IBS decoder 98 moves into the active state 112 to begin searching for the beginning of an IBS packet 70.

 FIG. 12 shows the active state 112 for the IBS decoder 98. Block 130 is notified by the search state 110 when an in band tone is detected in the audio channel.
20 Samples of the audio tones are windowed in block 132 with a number of samples associated with a single binary bit. In one embodiment, 80 samples of the digital data tone are taken, padded with zeros, and then correlated with Discrete Fourier Transforms (DFTs).

 A first DFT has coefficients representing a 500 Hz tone and is applied to the
25 windowed data in block 134. The first DFT generates a high correlation value if the samples contain a 500 Hz tone ("0" binary bit value). A second DFT represents a 600 Hz tone and is applied to the windowed samples in block 136. The second DFT generates a high correlation value if the windowed samples contain a 600 Hz tone ("1" binary bit value). Block 138 selects either a binary "0" or binary "1" bit value
30 for the windowed data depending on which of the 500 Hz DCT or 600 Hz DCT

yields the largest correlation value.

The IBS decoder 98 in decision block 140 continues to demodulate the tones until the preamble of the IBS packet 70 has been detected. The IBS decoder 98 then moves to clock recovery state 114 (FIG. 13) to synchronize with the sync pattern 74 in the IBS packet 70 (FIG. 5). If more bits need to be demodulated before the preamble 73 can be verified, decision block 140 returns to block 132 and the next 80 samples of the digital data tones are windowed and demodulated.

FIG. 13 describes the clock recovery state 114 for the IBS decoder 98. After the preamble 73 in the IBS packet 70 is detected in the active state 112, the clock recovery state 114 demodulates the next string of bits associated with the sync pattern 74 (FIG. 5). The clock recovery state 114 aligns the tone samples with the center of the correlation filters described in the active state 112. This improves decoder accuracy when demodulating the IBS packet payload 76.

Decision block 142 looks for the sync pattern 74 in the IBS packet 70. If after demodulating the next tone, the sync pattern 74 is not found, decision block 142 offsets the window used for sampling the sync pattern 74 by one sample in block 148. Decision block 150 then rechecks for the sync pattern 74. If the sync pattern 74 is found, decision block 144 determines the power ratio for the detected sync pattern. This power ratio represents a confidence factor of how well the demodulator is synchronized with the sync pattern. The power ratio is compared with the power ratios derived for different window shifted sampling positions. If the power ratio is greater than a previous sampling position, then that power ratio is saved as the new maximum power ratio in block 146.

If the power ratio for the sync pattern 74 is less than the previously measured power ratio, the decoder in block 148 offsets the sampling window by one sample position. The power ratio is then determined for the shifted window and then compared to the current maximum power ratio in decision block 144. The window is shifted until the maximum power ratio is found for the sync pattern 74. The window offset value at the maximum power ratio is used to align the demodulator correlation filters with the center sample of the first bit 77 (FIG. 5) in the IBS packet payload

76.

The IBS decoder 89 then jumps to demodulate state 116 (FIG. 10) where the identified window offset is used to demodulate the remaining 500 and 600 Hz tones that represent the packet payload bits 76 and check sum bits 78. The demodulation
5 state 116 correlates the f1 and f2 tones with DFTs in the same manner as in the active state (FIG. 12). The check sum bits 78 are then used as a final check to verify that a valid IBS packet has been received and accurately decoded.

FIG. 14 is a diagram of the IBS modem 28 located in a battery pack connected to the cellular telephone 14. A hands free audio channel pin 200 couples
10 the IBS modem 28 to the voice channel 202 in the cell phone 14. A switch 204 couples either voice signals from the microphone 17 or digital data tones from the IBS modem 28 to the voice channel 202.

The switch 204 is controlled either through a menu on a screen (not shown) in the cell phone 14 or by a button 206 that extends out of the back end of the battery
15 pack 208. The switch 204 can also be controlled by one of the keys on the keyboard of the cell phone 14.

The button 206 can also be used to initiate other functions provided through the IBS modem 28. For example, a Global Positioning System (GPS) includes a GPS receiver 210 located in the battery pack 208. The GPS receiver 210 receives GPS
20 data from a GPS satellite 212. A cell phone operator simply pushes button 206 during an emergency situation. Pressing the button 206 automatically enables the GPS receiver 210 to collect GPS data from GPS satellite 212. At the same time, the switch 204 connects IBS modem 28 on the voice channel 202 of the cell phone 14. The IBS modem 28 is then activated. As soon as the GPS data is collected in the
25 IBS modem 28, the data is formatted, encoded and output by IBS modem 28 to the voice channel 202 of the cell phone 14.

The user 23 can push the button 206 anytime after manually calling up a phone number. After the audio channel is established with another endpoint, the user
30 23 pushes button 206. Switch 204 is connected to the IBS modem 28 and the IBS modem 28 is activated. The GPS data (or other digital source) is then sent as digital

data tones through the IBS modem 28 to an endpoint over the established audio channel. After the data has been successfully transmitted, the user presses button 206 again reconnect switch 204 to the audio receiver 17.

FIG. 15 shows the different types of data sources that can be connected to the IBS modem 28. Any one of a palm computer 212, GPS receiver 214 or a laptop computer 216, etc. can be coupled to the IBS modem 28. The IBS modem 28 converts the bits output from the device into digital data tones that are then output over the audio channel 34 in the wireless network. Because data can be transmitted to another endpoint through the cell phone 14, none of the devices 212, 214 or 216 need a separate wireless modem.

It will be obvious to those having skill in the art that many changes may be made to the details of the above-described embodiments of this invention without departing from the underlying principles thereof. The scope of the present invention should, therefore, be determined only by the following claims.

Claims

1. An inband signaling modem for communicating digital data over a voice channel of a telecommunications network comprising:
 - an input for receiving digital data;
 - 5 an encoder for converting the digital data into audible tones that synthesize frequency characteristics of human speech and prevent voice encoding circuitry in the telecommunications network from corrupting the digital data represented by the synthesized audio tones; and
 - an output for outputting the synthesized audio tones to a voice channel of a
 - 10 digital wireless telecommunications network.
2. An inband modem according to claim 1 wherein the synthesized tones are transmitted to avoid interference with actual voice signals transmitted over the same voice channel.
3. An inband modem according to claim 1 wherein the encoder includes:
 - 15 a packet formatter for formatting the digital data into inband signaling packets; and
 - a modulator for converting bits in the inband signaling packets into the synthesized tones.
4. An inband modem according to claim 3 wherein the packet formatter
- 20 appends a preamble of bits to the digital data for sacrificing to any encoding circuitry that corrupts initial tones in the inband signaling packets.
5. An inband modem according to claim 4 wherein the packet formatter appends a postamble of bits to the ends of the inband signaling packets for sacrificing to any encoding circuitry that corrupts the synthesized tones.
- 25 6. An inband modem according to claim 3 wherein the packet formatter appends a sequence of bits at the fronts of the inband signaling packets that precondition the encoding circuitry by simulating generally the sequence of synthesized tones representing the digital data.
7. An inband modem according to claim 1 wherein the encoder converts
- 30 binary "1" bits in the digital data to a first tone having a first frequency within a

human voice range and converts binary "0" bits in the digital data to a second tone having a second frequency within the human voice range.

8. An inband modem according to claim 7 wherein the first and second frequency are both between 400 and 1000 Hertz.

5 9. An inband modem according to claim 1 where the encoder generates samples of the digital data at about 8000 samples per second and outputs the encoded audio tones representing the bits of the digital data at a rate of about 100 bits per second.

10 10. An inband modem according to claim 9 wherein the sequence of first and second frequencies as a continuous signal with from 5 to 15 milliseconds time periods for each binary bit in the digital data.

11. An inband modem according to claim 9 wherein the amplitude of the first and second frequencies are about 25 millivolts.

15 12. An inband modem according to claim 1 wherein the encoder is located in a battery pack detachably coupled to a cellular telephone.

13. An inband modem according to claim 12 including a digital to analog converter located in the battery back that is coupled to the encoder and that outputs analog signals representing the synthesized tones to the cellular telephone.

20 14. An inband modem according to claim 13 wherein the analog signals are fed into a same analog to digital converter in the cell phone that processes human voice signals.

15. An inband modem according to claim 1 wherein the encoder is implemented as software in a cellular telephone processor that also operates as a voice coder.

25 16. An inband modem according to claim 1 including a decoder for decoding the synthesized tones transmitted over the voice channel of the telecommunications network.

30 17. An inband modem according to claim 16 wherein the decoder includes:
a first inband filter for detecting signals outside of a synthesized tone frequency band;

a second out of band filter for detecting signals inside the synthesized tone frequency band; and

a comparator that compares the signals detected outside the synthesized tone frequency band with the signals detected inside the synthesized tone frequency band and identifies signals as synthesized tones when the compared value is greater than a selected value.

18. A modem according to claim 17 wherein the decoder includes an active state that correlates detected synthesized tones with a first audio tone representing a binary "1" value and a second audio tone representing a binary "0" value.

19. A modem according to claim 16 wherein the decoder synchronizes decoding of the synthesized tones by shifting samples of the simulated tones until a maximum power ratio is detected for a digital synchronization pattern transmitted with in the simulated voice data.

20. A cellular telephone, comprising:
an audio microphone for converting voice signals into electrical voice signals;
an analog to digital converter for converting the electrical voice signals into digital voice samples;

a voice coder for converting the digital voice samples into encoded digital voice signals;

a transceiver that transmits the encoded digital voice signals over a digital voice channel of a wireless communications network; and

an inband signaling modem that converts a digital bit stream into synthesized tones and outputs the synthesized tones to the voice coder, the voice coder encoding the synthesized tone in the same manner as the electrical voice signals before being transmitted over the digital voice channel.

21. A cellular telephone according to claim 20 including a digital to analog converter coupled between the inband signaling modem and the analog to digital converter.

22. A cellular telephone according to claim 21 wherein the inband signaling modem and the digital to analog converter are located in a device detachably coupled to the cellular telephone.

23. A cellular telephone according to claim 20 including a packet formatter
5 that converts the digital bit stream into inband signaling packets that include sacrifice bits that can be corrupted without losing any of the content of the digital bit stream.

24. A cellular telephone according to claim 23 wherein the sacrifice bits are located at the beginning and at the end of the inband signaling packets.

25. A cellular telephone according to claim 23 wherein the packet
10 formatter attaches a sequence of preconditioning bits to the inband signaling packets that enable the voice coder to adapt to the frequencies, bit rate and sequence of synthesized tones that represent the digital bit stream.

26. A cellular telephone according to claim 25 wherein the preconditioning bits are a random sequence of "1" and "0" binary bits.

15 27. A cellular telephone according to claim 20 including a decoder (16) coupled to the voice coder for detecting and decoding synthesized tones received over the digital voice channel.

28. A cellular telephone according to claim 27 wherein the decoder includes:

20 a first inband filter for filtering signals outside of a synthesized tone frequency band;

a second out of band filter for filtering signals inside the synthesized tone frequency band; and

25 a comparator that compares the signals outside the synthesized tone frequency band with the signals inside the synthesized audio tone frequency band and identifies signals as synthesized tones when the compared value is greater than a selected value.

29. A cellular telephone according to claim 28 wherein the decoder includes:

an active state that correlates detected synthesized tones with a first transform representing a binary "1" value and a second transform representing a binary "0" value;

5 a clock recovery state that synchronizes the decoder to the synthesized tones by first shifting samples of the synthesized tones until a maximum power ratio is detected in a digital synchronization pattern in the simulated voice data; and a demodulation state where synthesized audio tones are demodulated back into digital data.

30. A cellular telephone according to claim 20 wherein the synthesized tones are generated at a first audible frequency to represent binary "1" values and at a second audible frequency to represent binary "0" values, the first and second frequencies being about 100 Hertz apart, each extending for a duration of about 10 milliseconds and generated as one continuous signal.

31. An inband signaling modem for communicating digital data over a digital voice channel of a wireless communications network, comprising:

15 an input that receives voice signals over the voice channel of the wireless communications network;

a filter that detects synthesized tones representing the digital data and is interleaved with the voice signals transmitted over the digital voice channel, the synthesized tones synthesizing frequency characteristics of human speech and preventing voice encoding circuitry in the wireless telecommunications network from corrupting the digital data represented by the synthesized audio tones; and a demodulator that converts the detected synthesized tones back into the represented digital data.

25 32. An inband modem according to claim 31 wherein the filter includes:

a first inband filter for detecting signals outside of a synthesized tone frequency band;

a second out of band filter for detecting signals inside the synthesized tone frequency band; and

a comparator that compares the signals detected outside the synthesized tone frequency band with the signals detected inside the synthesized tone frequency band and identifies signals as synthesized tones when the compared value is greater than a selected value.

5 33. A modem according to claim 32 wherein the demodulator decoder includes an active state that correlates detected synthesized tones with a first audio tone representing a binary "1" value and a second audio tone representing a binary "0" value.

10 34. A modem according to claim 33 wherein the demodulator synchronizes decoding of the synthesized tones by shifting samples of the simulated tones until a maximum power ratio is detected for a digital synchronization pattern transmitted with in the simulated voice data.

15 35. A modem according to claim 34 wherein the modem includes an analog to digital converter for receiving signals from an digital to analog converter in a cellular telephone.

 36. A modem according to claim 35 including an encoder for converting the digital bit stream into synthesized tones and outputting the synthesized tones to a voice coder in the cellular telephone.

20 37. Software code for communicating digital data over a voice channel of a digital wireless telecommunications network comprising:

 code for forming the digital data into a packet payload in an inband signaling packet;

25 code for attaching preconditioning bits to the inband signaling packet that prevent circuitry in the wireless telecommunications network from corrupting the digital data;

 code for converting the bits in the inband signaling packet into a series of voice frequencies that simulate characteristics of human speech; and

 code for converting the simulated voice frequencies into encoded data transmitted over the digital voice channel of a wireless telecommunications network.

38. Software code according to claim 37 including code for generating a sequence of bits in a preamble of the inband signaling packet that preview the sequence of bits in the packet payload.

5 39. Software according to claim 37 including code that converts the synthesized voice frequencies into analog signals before sending the synthesized voice signals to a voice coder for transmission over the wire telecommunications network.

40. A method for communicating digital data over the voice channel of a digital wireless telecommunications network comprising:

10 receiving a digital bitstream;
encoding the digital bitstream into a continuous audio signal having different frequency tones for different bit values;
selecting the frequency tones to represent speech signals that will pass through a voice coder without being corrupted;
encoding the audio signal into encoded values with a voice coder for
15 transmitting over the digital wireless telecommunications network; and
transmitting the encoded values over the digital wireless telecommunications network.

41. A method according to claim 40 including:
segmenting the digital bitstream into packet payloads in inband signaling
20 packets; and
attaching preconditioning bits to the inband signaling packets that prevent circuitry in the digital wireless telecommunications network from corrupting the bits from the digital bitstream.

AMENDED CLAIMS

[received by the International Bureau on 17 July 2001 (17.07.01);
new claims 42-59 added; remaining claims unchanged (4 pages)]

38. Software code according to claim 37 including code for generating a sequence of bits in a preamble of the inband signaling packet that preview the sequence of bits in the packet payload.
39. Software according to claim 37 including code that converts the synthesized voice frequencies into analog signals before sending the synthesized voice signals to a voice coder for transmission over the wire telecommunications network.
40. A method for communicating digital data over the voice channel of a digital wireless telecommunications network comprising:
- receiving a digital bitstream:
- encoding the digital bitstream into a continuous audio signal having different frequency tones for different bit values:
- selecting the frequency tones to represent speech signals that will pass through a voice coder without being corrupted:
- encoding the audio signal into encoded values with a voice coder for transmitting over the digital wireless telecommunications network: and
- transmitting the encoded values over the digital wireless telecommunications network.
41. A method according to claim 40 including:
- segmenting the digital bitstream into packet payloads in inband signaling packets: and
- attaching preconditioning bits to the inband signaling packets that prevent circuitry in the digital wireless telecommunications network from corrupting the bits from the digital bitstream.
42. A cellular telephone, comprising:
- a microphone for converting audio data into analog audio signals:
- voice channel circuitry for encoding signals for transmission over a digital voice channel of a communications network:
- a modem for converting digital data into analog digital data tones: and
- a switching circuit that selectively connects the microphone to the voice channel circuitry for converting the analog audio signals into encoded audio signals or

selectively connecting the modem to the voice channel circuitry for converting the analog digital data tones into encoded digital data tones.

43. A cellular telephone according to claim 42 including a button that activates the switching circuit to switch between the modem and the microphone.

5 44. A cellular telephone according to claim 43 wherein the button and the modem are located on a cell phone battery pack.

45. A cellular telephone according to claim 44 including a hands free port extending out of the cellular telephone, the hands free port connecting the modem in the battery pack to the switching circuit in the cellular telephone.

10 46. A cellular telephone according to claim 43 wherein the button comprises a key on a cellular telephone key pad.

47. A cellular telephone according to claim 43 including a GPS receiver, the button when pressed connecting the modem to the voice channel circuitry and enabling the GPS receiver in the cellular telephone to collect GPS data, the modem
15 converting the collected GPS data into GPS digital data tones and sending the GPS digital data tones to the voice channel circuitry.

48. A cellular telephone according to claim 42 including a menu selection screen on the cellular telephone that controls the switching circuit.

49. A cellular telephone according to claim 42 wherein the voice channel
20 circuitry comprises a voice coder and a transceiver.

50. A method for transmitting data with a cellular telephone, comprising:
calling a number with the cellular telephone;

establishing a voice connection with the called number over a voice channel in the cellular telephone;

25 activating a modem in the cellular telephone to convert digital data into data tones; and

activating a switching circuit in the cellular telephone to connect the modem to the voice channel for transmission of the data tones to the called number.

51. A method according to claim 50 including depressing a button on the cellular telephone that automatically activates both the modem and activates the switching circuit to connect the activated modem to the voice channel.

52. A method according to claim 51 including locating the button and the
5 modem in a cellular telephone battery pack.

53. A method according to claim 52 wherein depressing the button enables a global positioning receiver in the cellular telephone to supply the digital data to the modem.

54. A method according to claim 50 including selecting a menu option on
10 the cellular telephone to activate the modem and activate the switching circuit to connect the activated modem to the voice channel.


55. A mobile communication device, comprising:
means for converting voice data into voice signals;
means for encoding the voice signals for transmission over a digital audio
15 channel of a communications network;
means for converting digital data into digital data tones; and
means for selectively connecting the voice signals to digital audio channel
circuitry for converting the voice signals into encoded voice signals for transmission
over the digital audio channel or selectively connecting the digital data tones to the
20 digital audio channel circuitry for converting the digital data tones into encoded
digital data tones for transmission over the digital audio channel.

56. A device according to claim 55 including means for activating the connecting means.

57. A device according to claim 56 wherein the activating means and the
25 means for converting digital data into digital data tones are located in an external device.

58. A device according to claim 57 including means for mechanically
attaching the external device to the mobile communications device while at the same
time electrically coupling the means for converting digital data into digital data tones
30 to the connecting means.

59. A device according to claim 58 including means for supplying GPS data to the converting means.

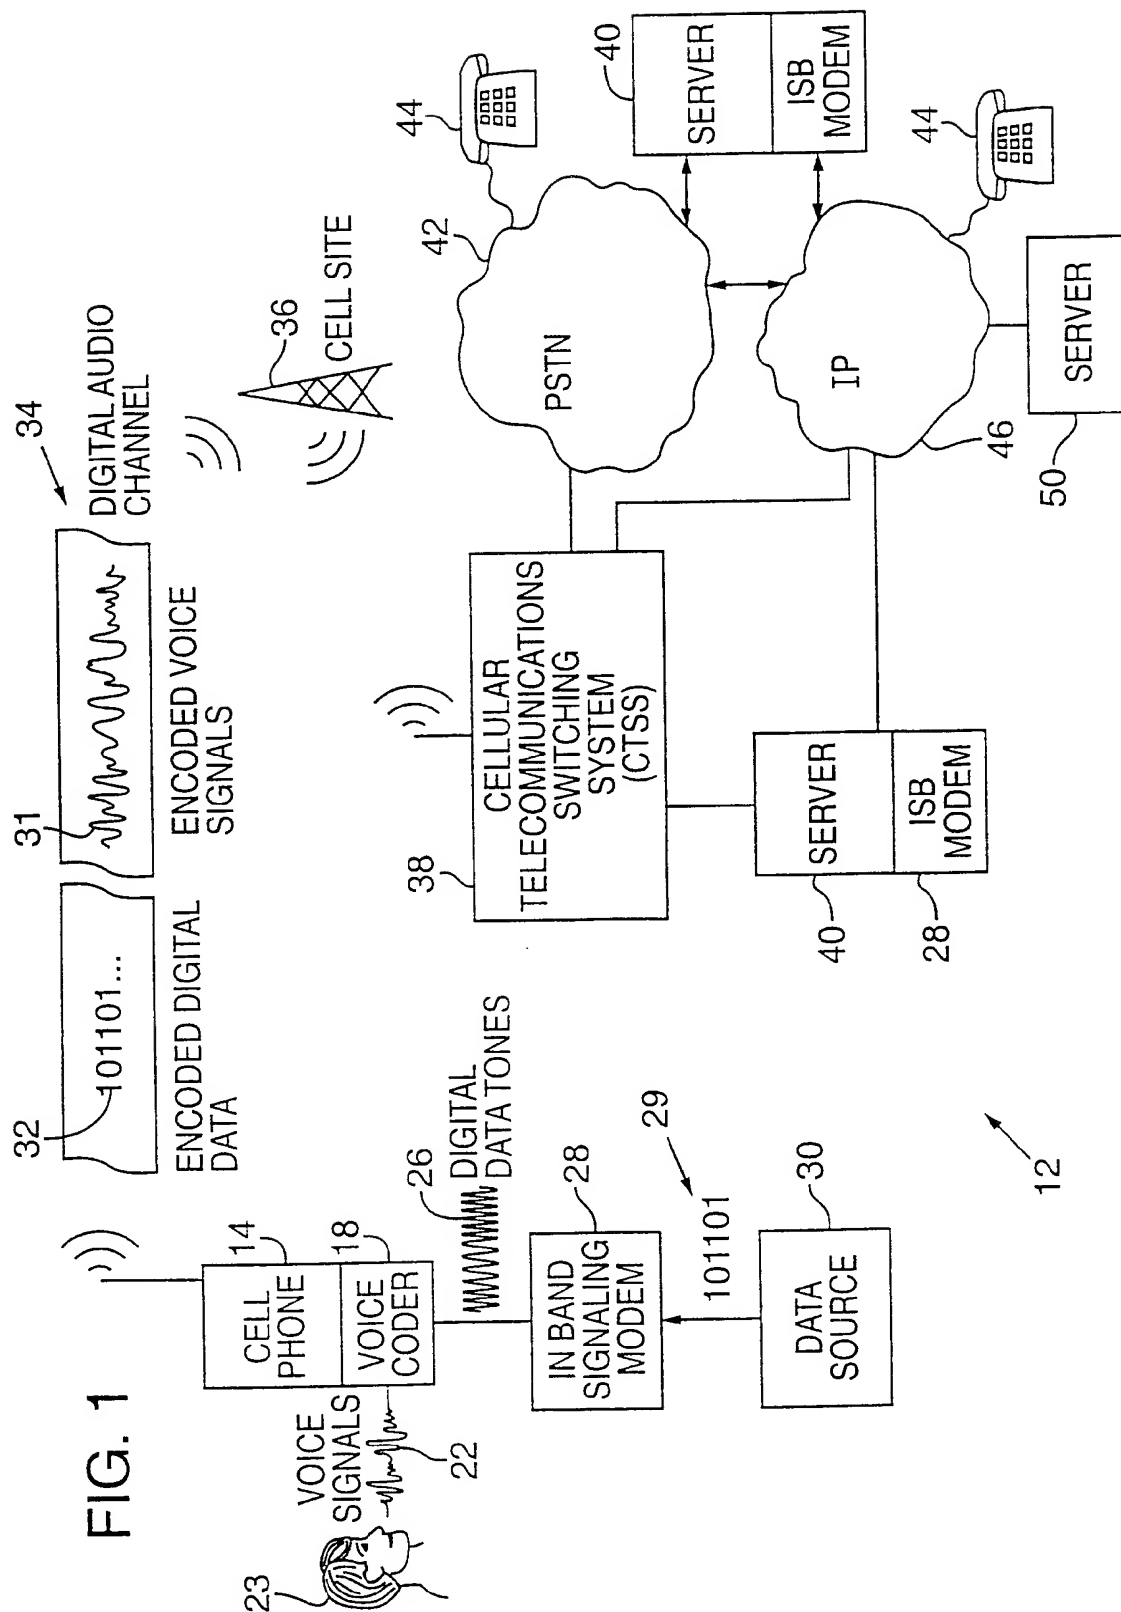

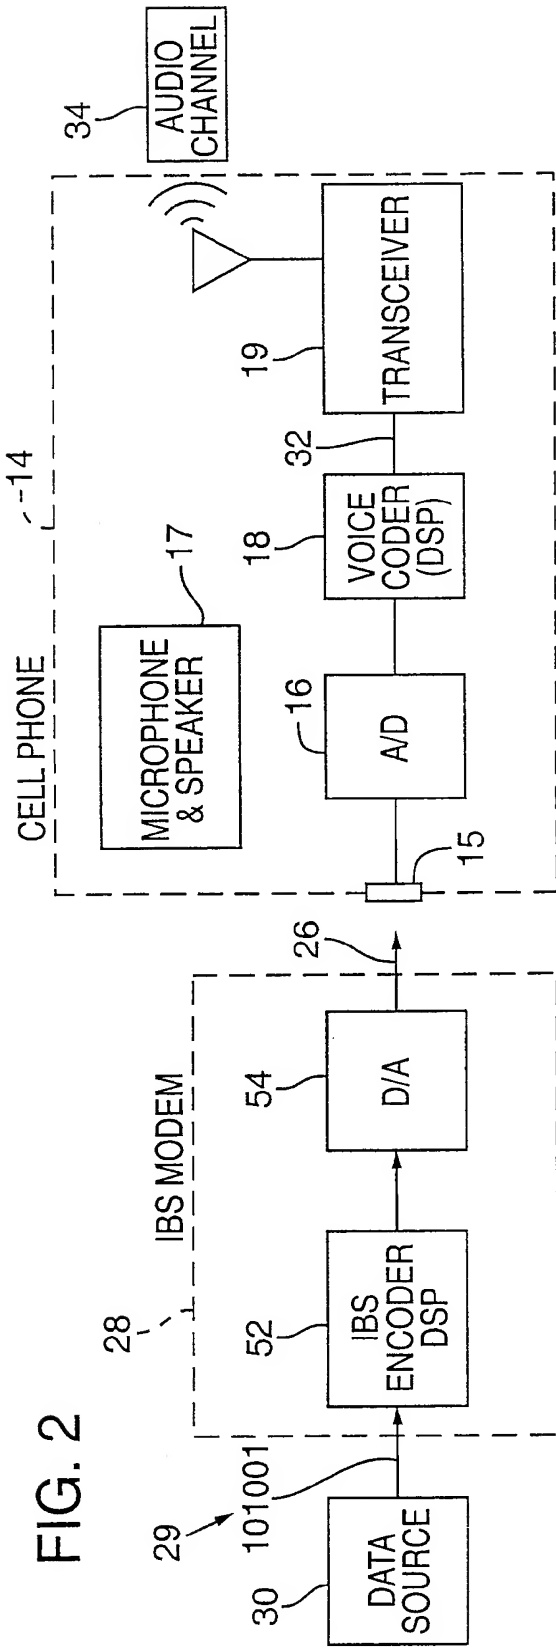


FIG. 2

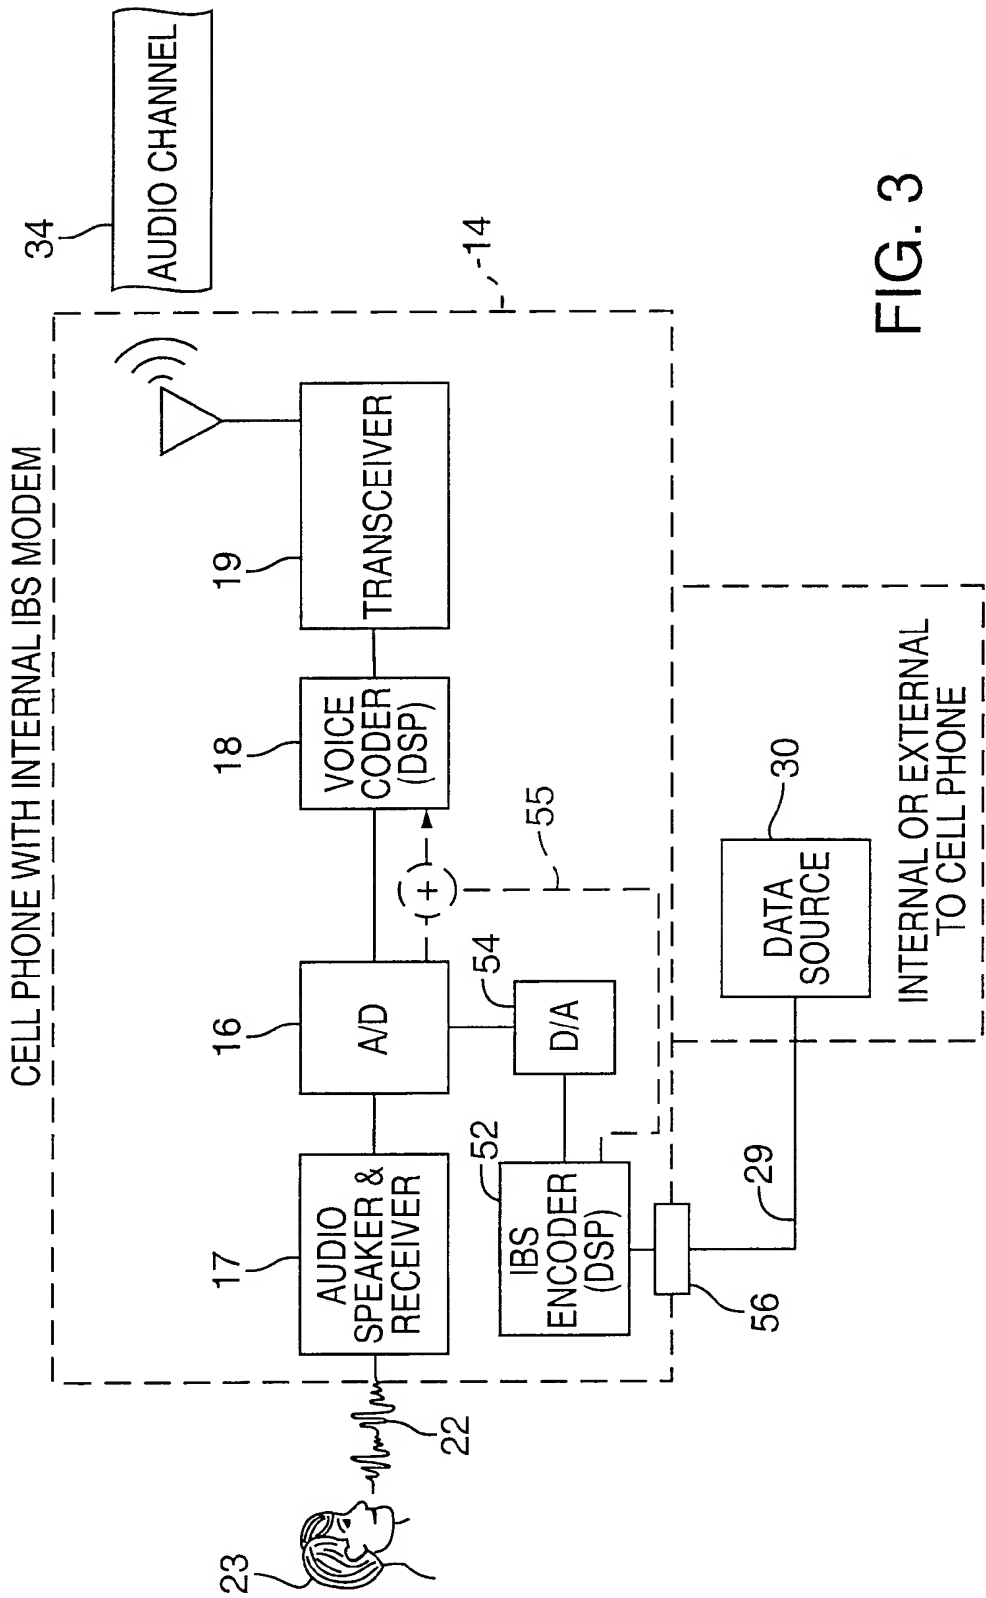


FIG. 3

FIG. 4



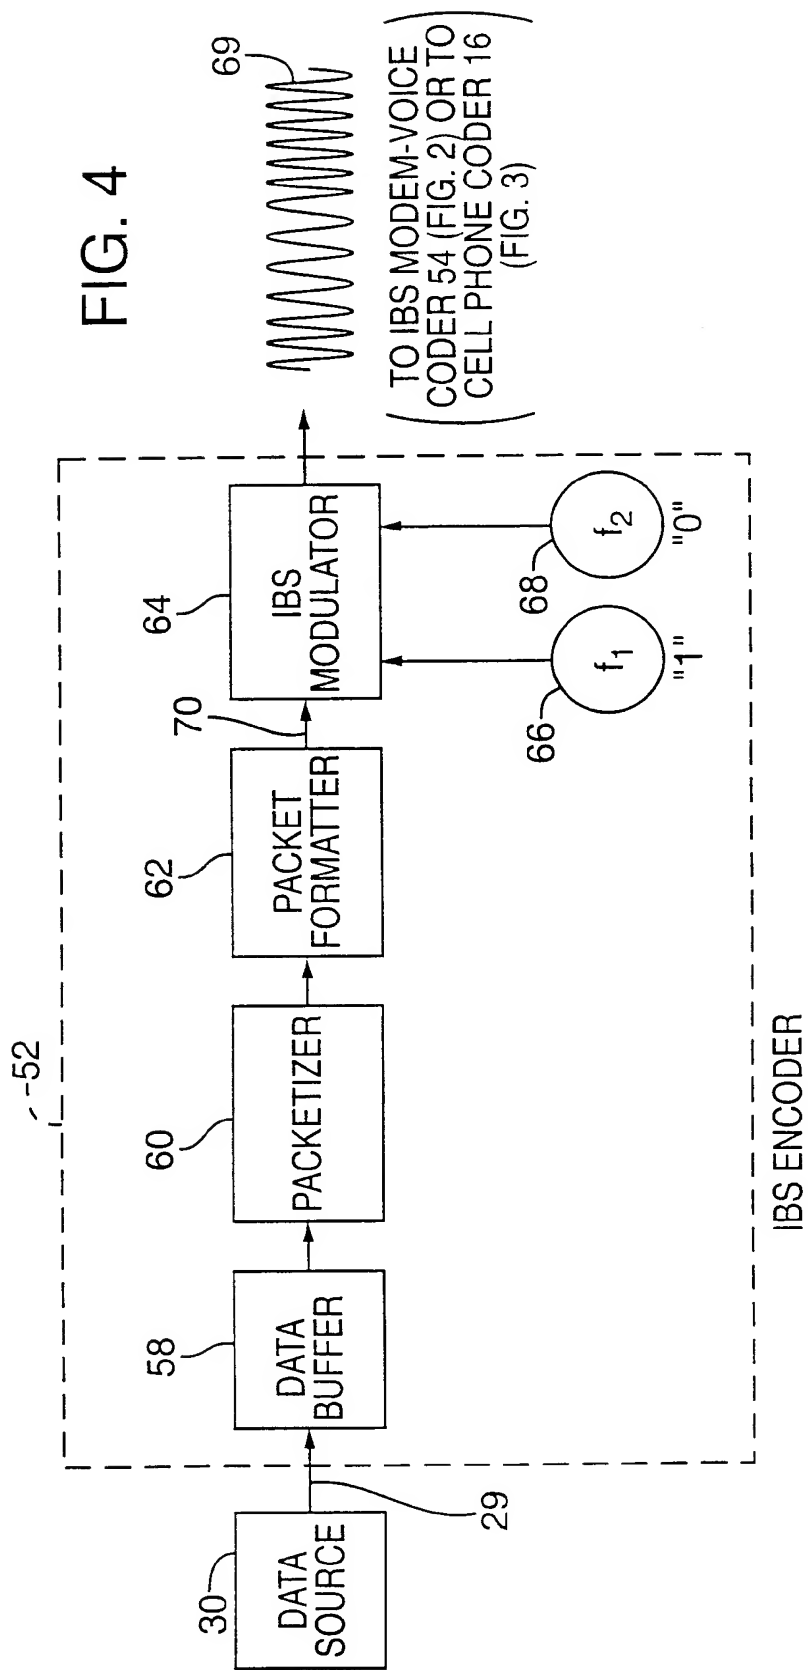


FIG. 5

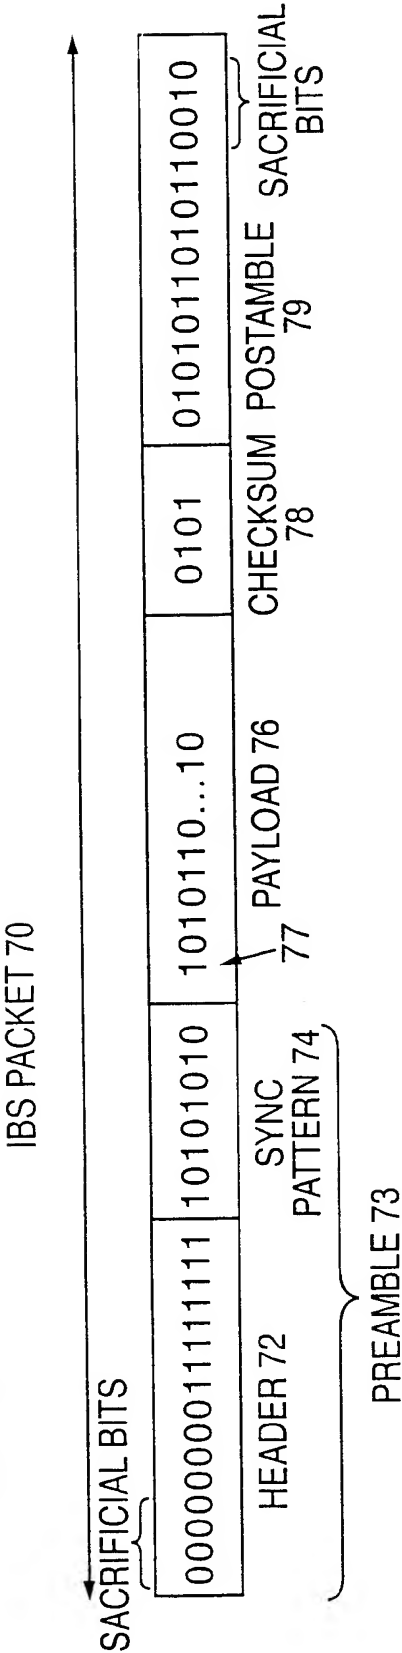

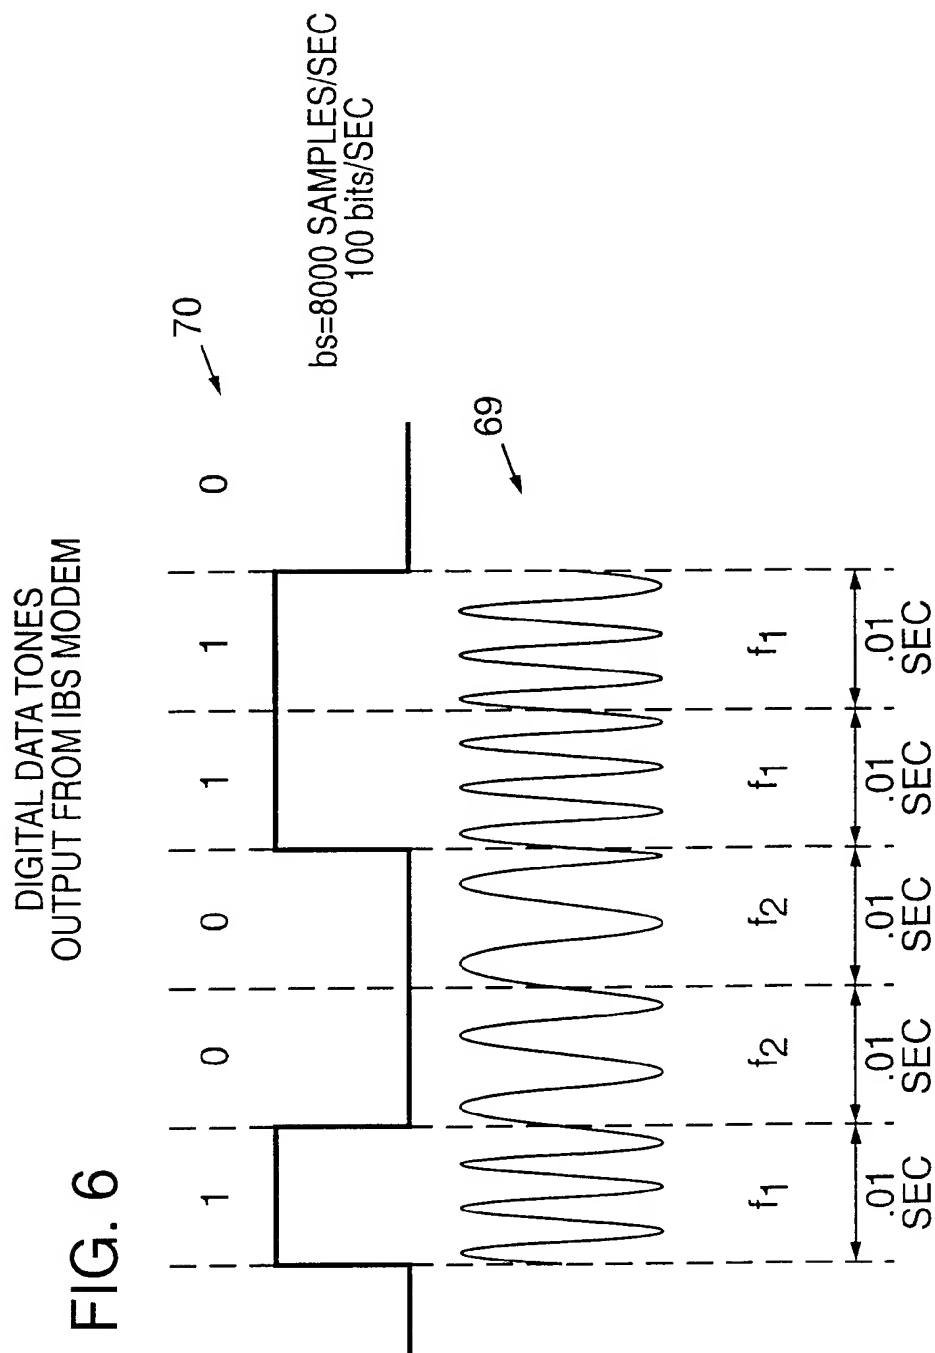

7/14

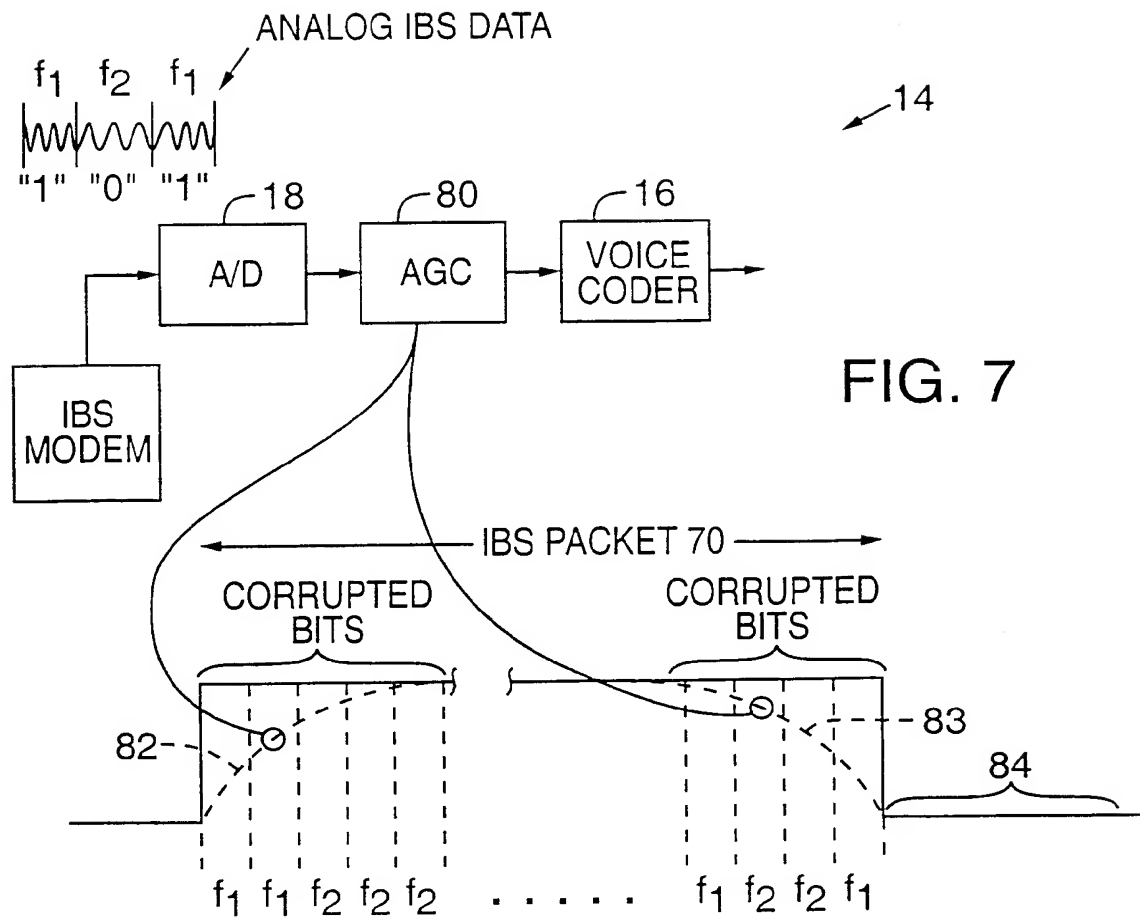


FIG. 7


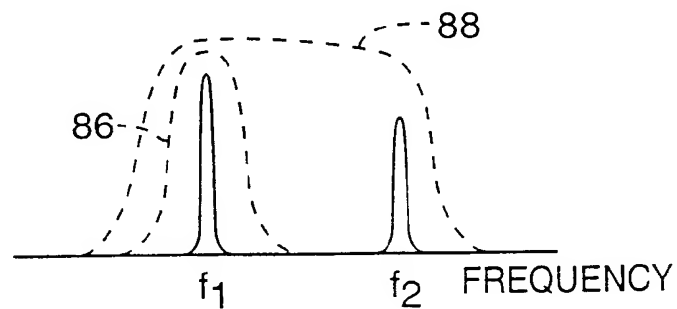


FIG. 8


8/14

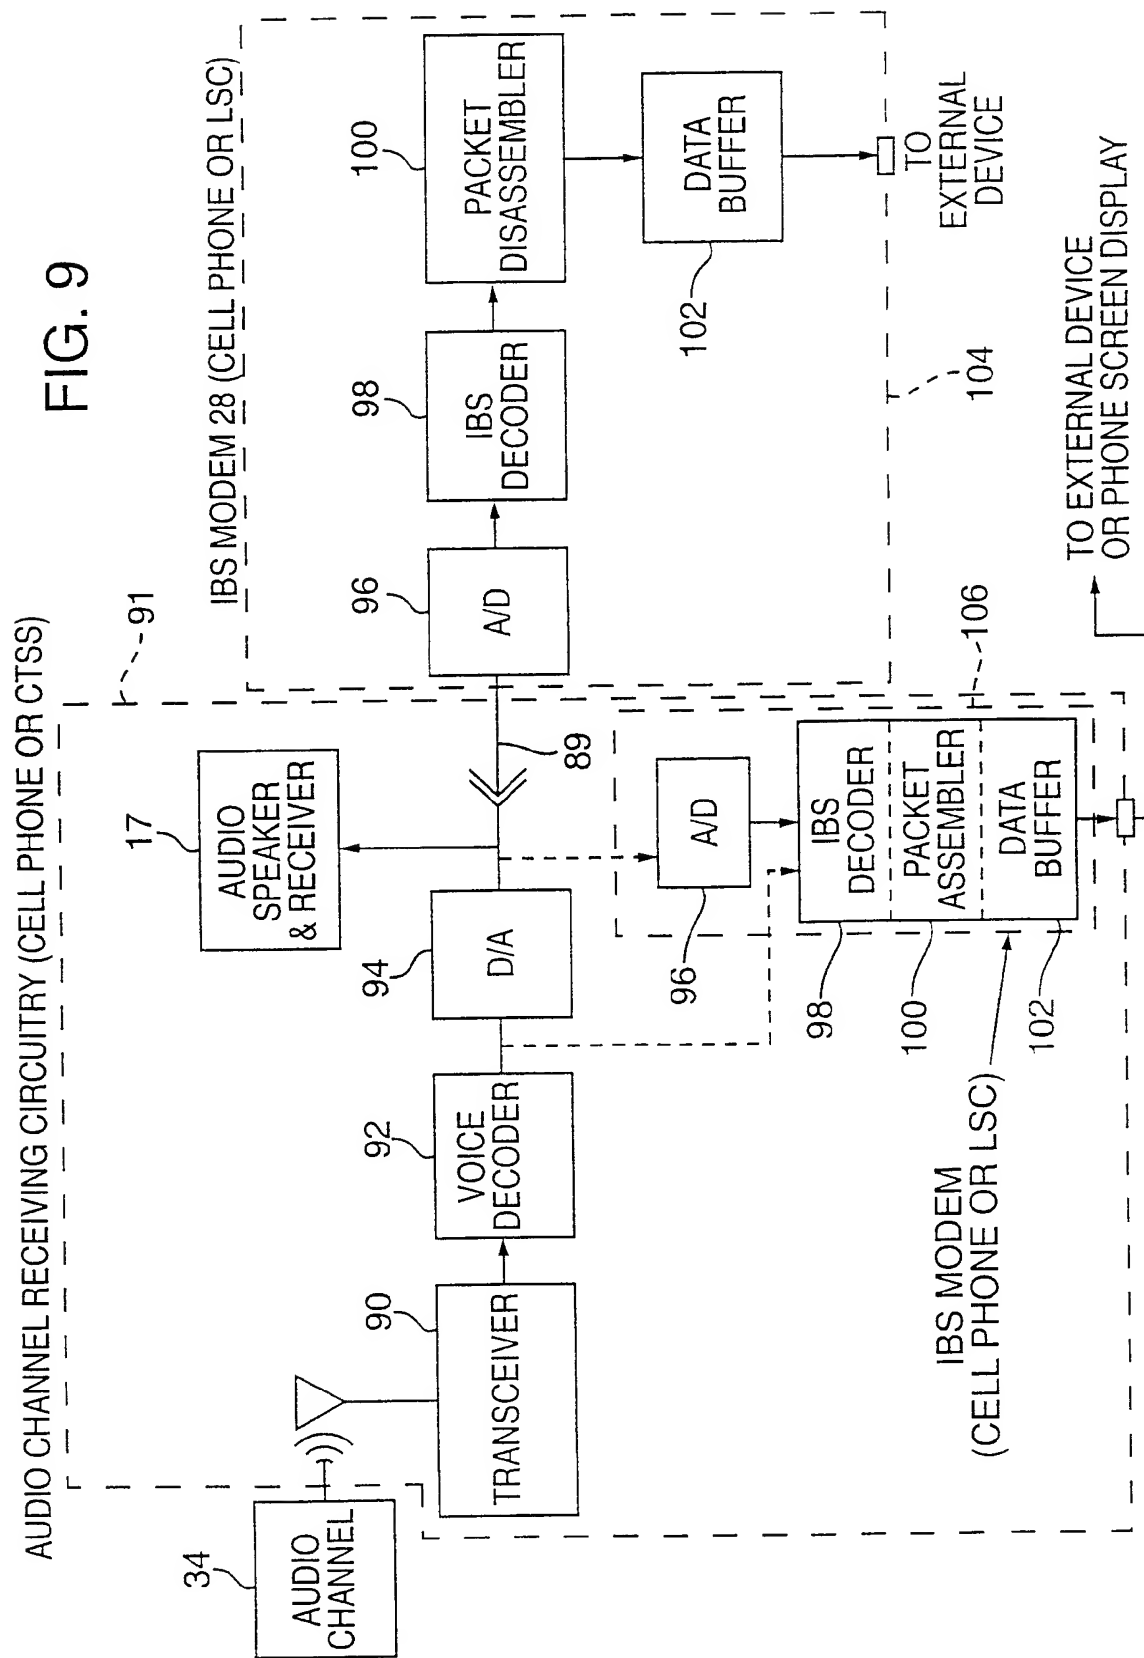


9/14

98
↓STATE DIAGRAM FOR
IBS DECODER 98

FIG. 10

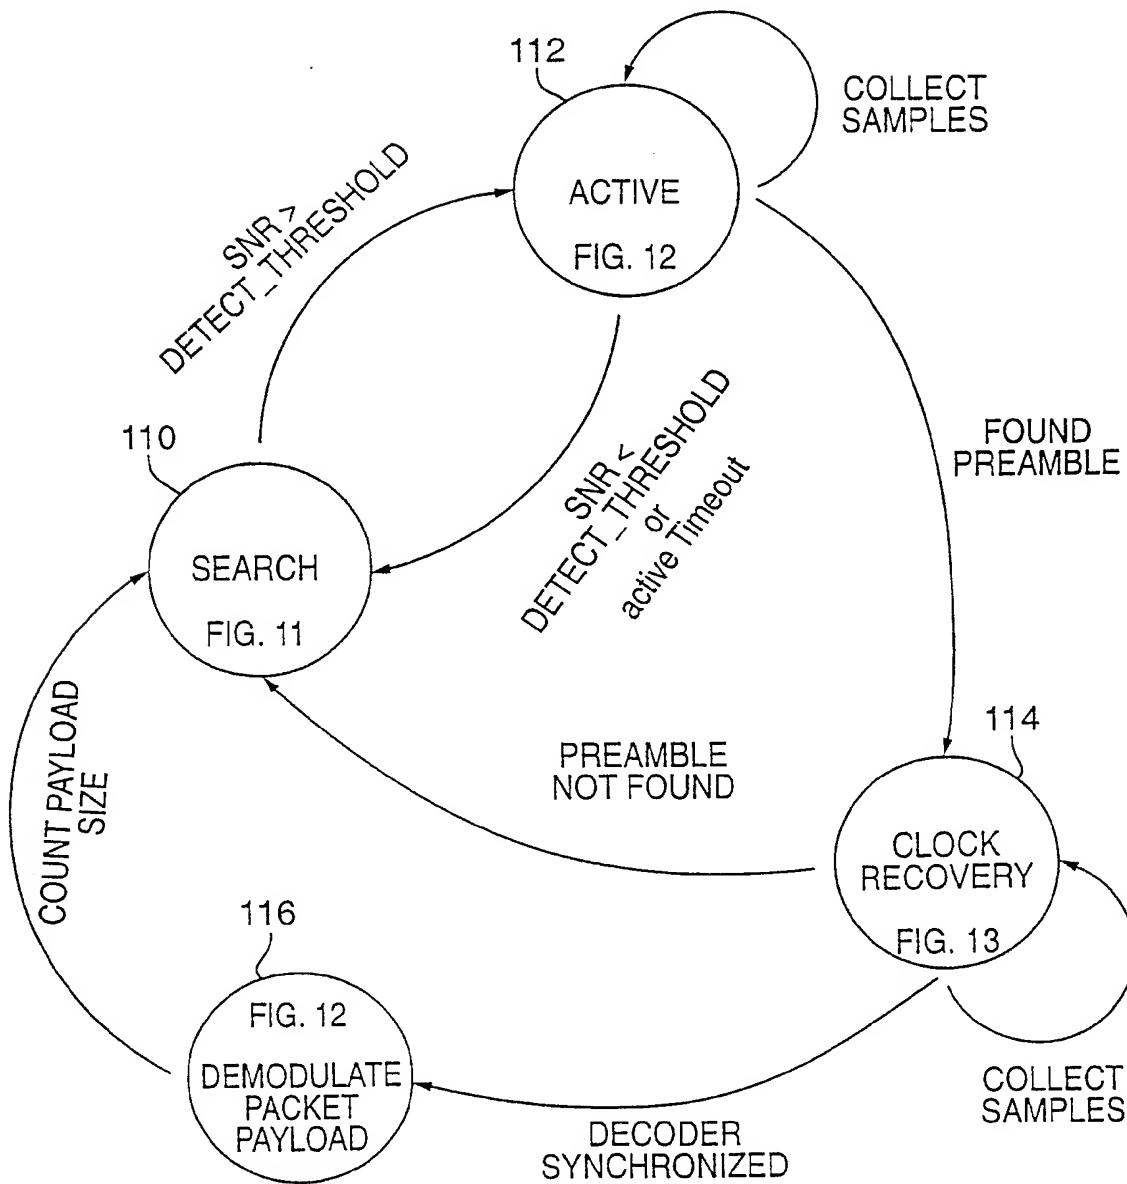

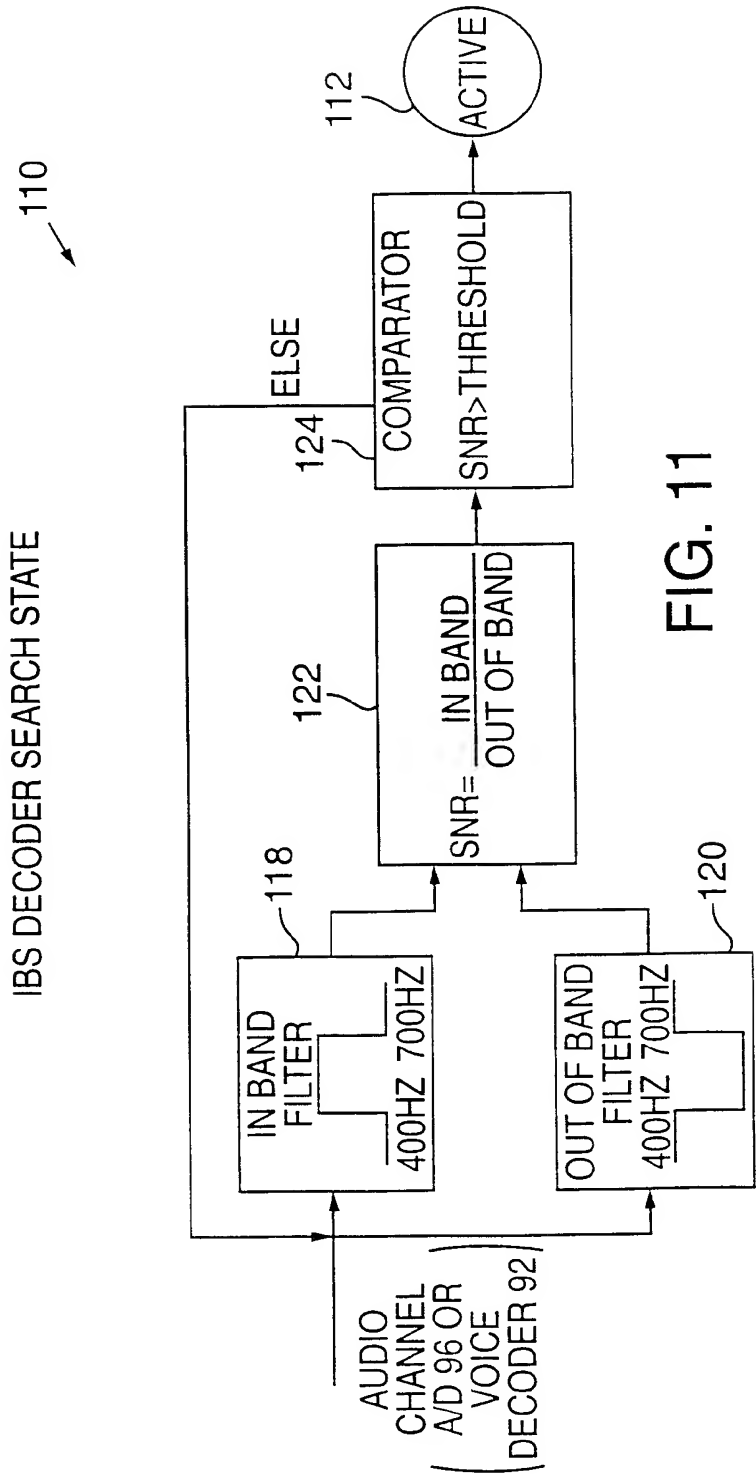

11/14


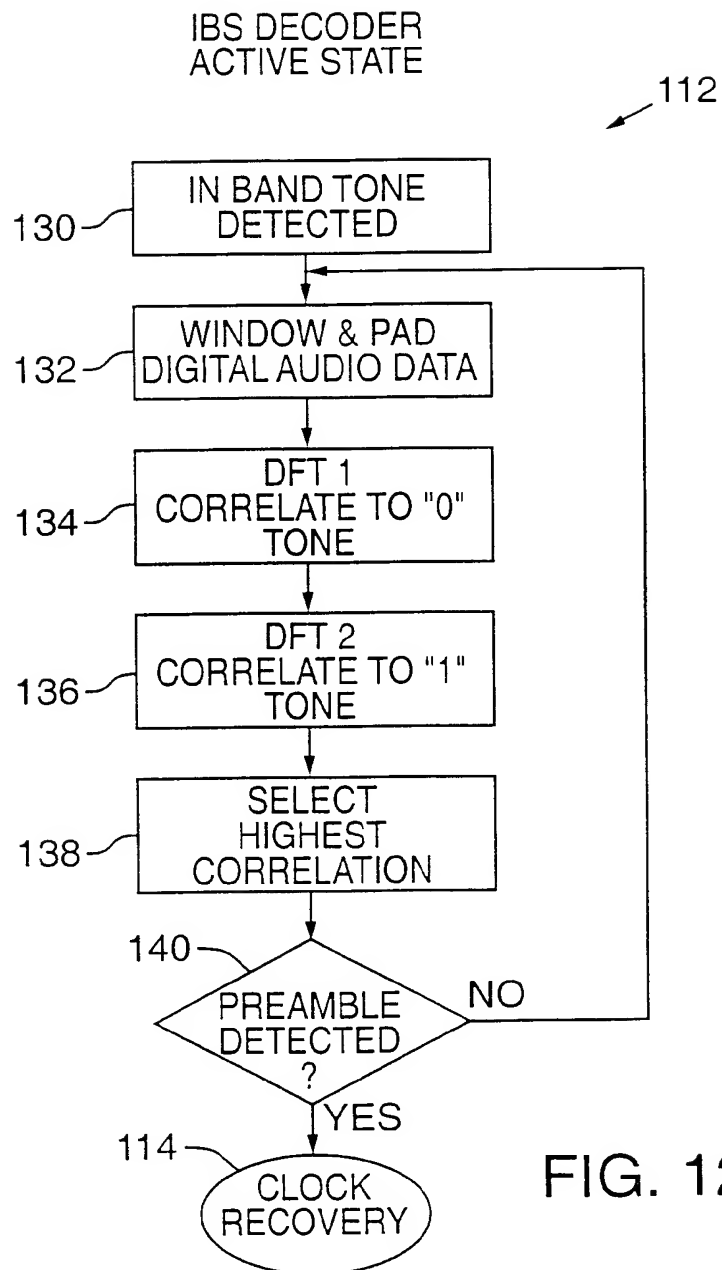



FIG. 12

12/14

FIG. 13

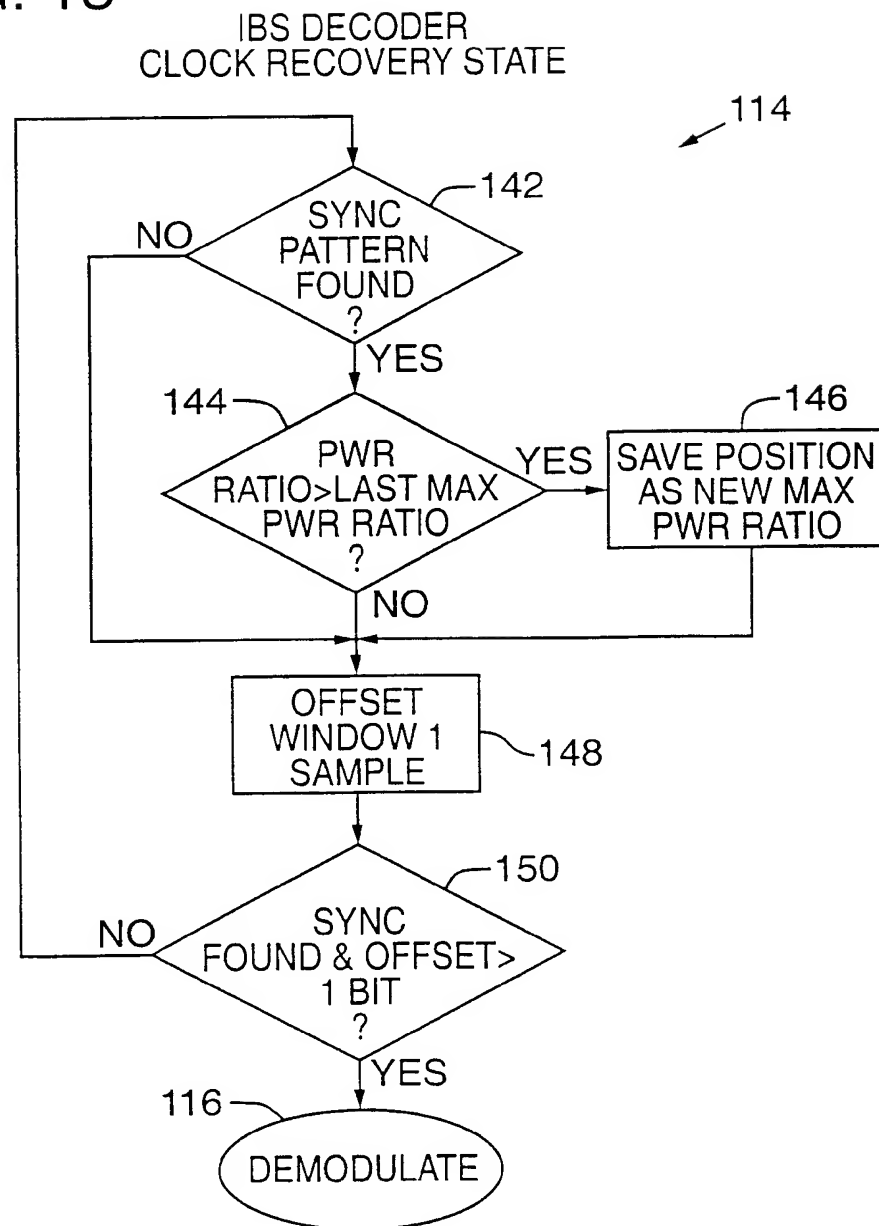


13/14

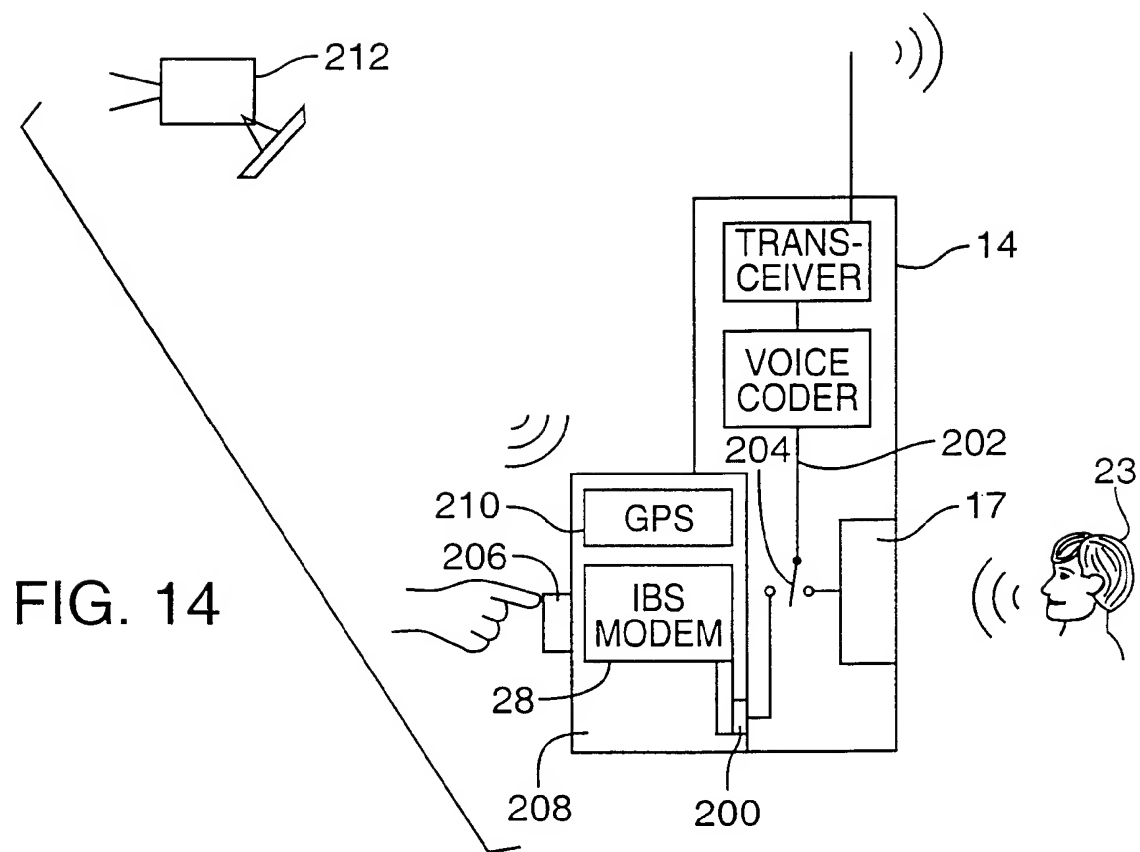

14/14

FIG. 15

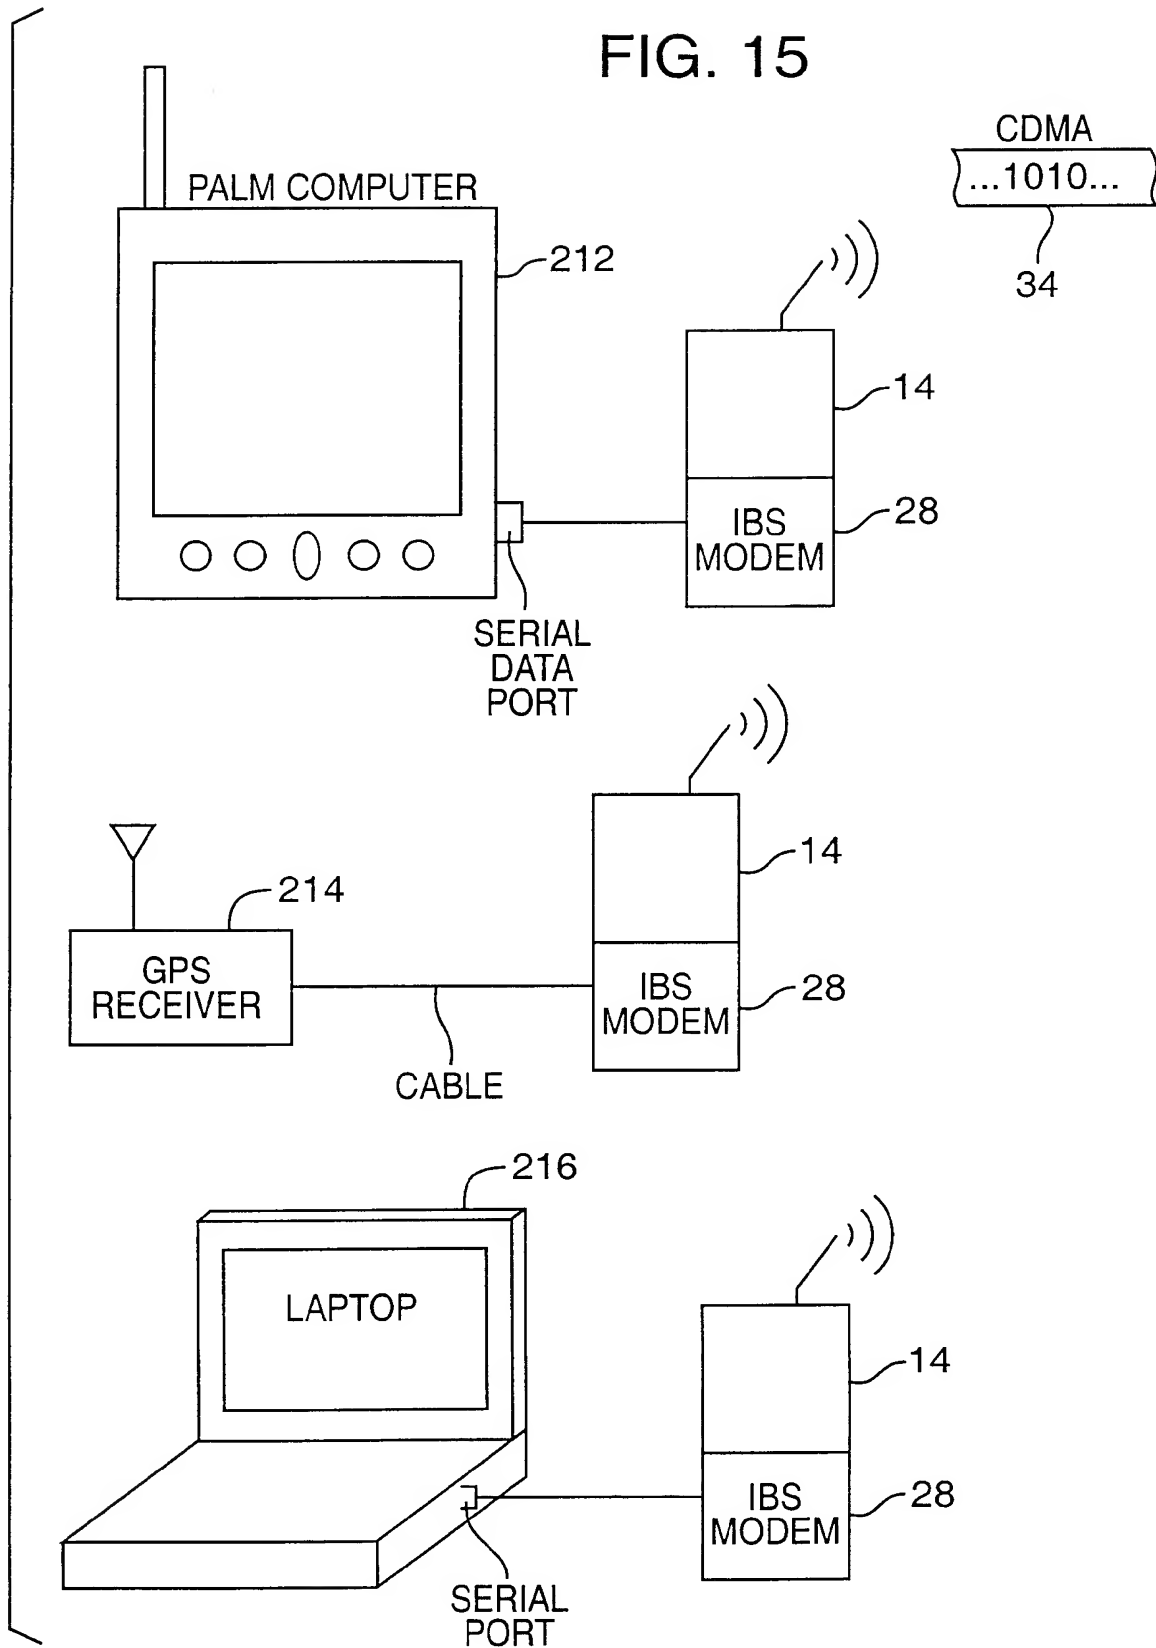

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/13288

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 545 783 A (SAGEM) 9 June 1993 (1993-06-09) the whole document	1-3,7, 16,20, 27,31,40
Y	---	15
Y	MUELLER A J ET AL: "A DSP IMPLEMENTED DUAL 9600/7200 BPS TCM MODEM FOR MOBILE COMMUNICATIONS OVER FM VOICE RADIOS" PROCEEDINGS OF THE 1997 6TH IEEE PACIFIC RIM CONFERENCE ON COMMUNICATIONS, COMPUTERS AND SIGNAL PROCESSING, vol. 2, 20 - 22 August 1997, pages 758-761, XP000852273 IEEE, New York, NY, USA ISBN: 0-7803-3906-1 the whole document	15
A	---	37
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

17 November 2000

Date of mailing of the international search report

27/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moreno, M

INTERNATIONAL SEARCH REPORT

Int. Appl. No.
PCT/US 00/13288

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	COLEMAN A ET AL: "Subjective performance evaluation of the RPE-LTP codec for the pan-European cellular digital mobile radio system" GLOBECOM'89. IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE AND EXHIBITION, vol. 2, 27 - 30 November 1989, pages 1075-1079, XP002143130 IEEE, New York, NY, USA Page 1077-1078: Performance with non-voice signals	1,16,20, 21,27,40
Y	---	12-14,22
Y	US 5 786 789 A (JANKY JAMES M) 28 July 1998 (1998-07-28) page 11, column 2, line 52 - line 55 page 12, column 4, line 41 - line 44 figure 6	12-14,22
X	---	
X	LIN D ET AL: "DATA COMPRESSION OF VOICEBAND MODEM SIGNALS" 40TH IEEE VEHICULAR TECHNOLOGY CONFERENCE. ON THE MOVE IN THE 90'S, 6 - 9 May 1990, pages 323-325, XP000204133 IEEE, New York, NY, USA Introduction page 324, column 1, line 8 - line 12 Evaluation	1,2,16, 20,27,40
A	---	
A	WO 99 49677 A (ERICSSON TELEFON AB L M) 30 September 1999 (1999-09-30) page 1, line 8 - line 9 page 1, line 18 - line 31 page 4, line 13 - line 17 page 10, line 6 - line 8 figure 3	1,16,17, 20,31,40
A	---	
A	US 5 479 480 A (SCOTT ROBERT E) 26 December 1995 (1995-12-26) page 6, column 1, line 62 - line 65 page 8, column 5, line 47 - line 50 page 8, column 5, line 31 - line 34 page 6, column 2, line 57 - line 66	1,20,21
A	---	
A	WO 00 11893 A (MOTOROLA INC) 2 March 2000 (2000-03-02) page 1, line 15 - line 21 page 10, line 15 - line 24	1,16,17, 27,28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/13288

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0545783	A	09-06-1993	FR 2684507 A AT 176564 T DE 69228366 D DE 69228366 T ES 2129440 T	04-06-1993 15-02-1999 18-03-1999 09-09-1999 16-06-1999
US 5786789	A	28-07-1998	NONE	
WO 9949677	A	30-09-1999	US 6112084 A AU 3348499 A	29-08-2000 18-10-1999
US 5479480	A	26-12-1995	CA 2134131 A CN 1122076 A EP 0661893 A IL 112160 A JP 7222252 A	01-07-1995 08-05-1996 05-07-1995 15-06-1998 18-08-1995
WO 0011893	A	02-03-2000	US 6091969 A US 6070089 A WO 0011892 A	18-07-2000 30-05-2000 02-03-2000